

SILVER SPORT

Transmissions

TKX STX AFTERMARKET SHIFTER INSTALLATION INSTRUCTIONS

TO INSTALL STX SHIFTER ASSEMBLY:

1. Remove the 6 bolts attaching the original stock shifter assembly to transmission.




2. Thoroughly clean shifter mounting flange on the transmission of old gasket.
3. Install new gasket onto the shift mounting surface.



4. Install shifter baseplate using the 6 bolts provided be sure to use the 2 flat screws in the countersunk locations. Tighten bolts to 6-11 lb-ft torque.



5. Install shifter gasket, and shift tower assembly to shifter baseplate. Use the two 5/16-18 x 2in, apply some rtv to the threads, and torque to 12-16 lb-ft.

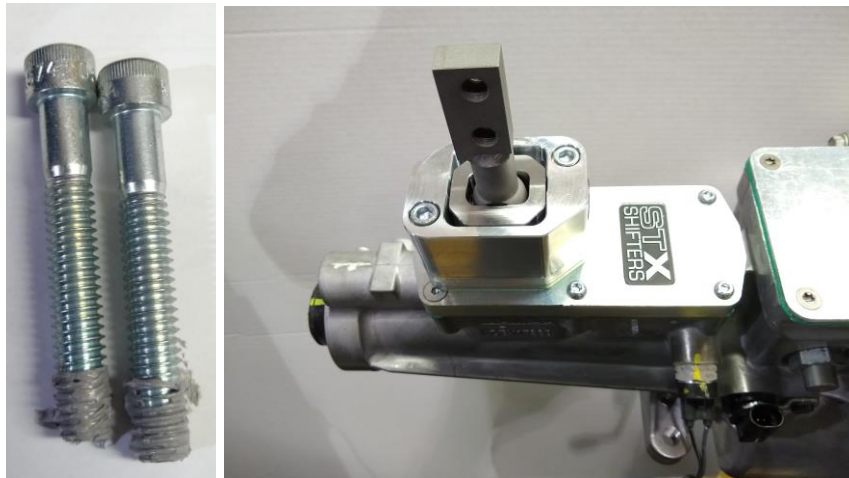

6. Install the shifter dust boot.

